



## Perm-O-Pads® Integrated Circuit Mounts

A55485/02-031N PRICE CODE: B  
M38527/02-031N

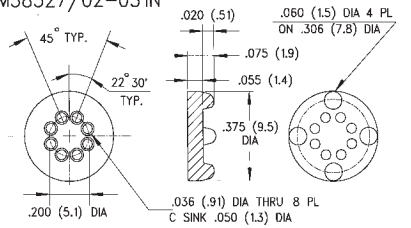


610-075 8 LEADS

PRICE CODE: B

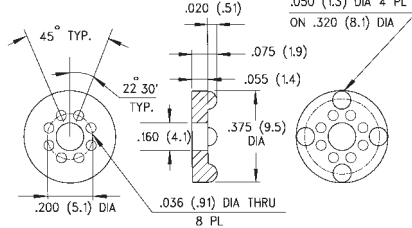


615-075 8 LEADS

A55485/02-033N PRICE CODE: B  
M38527/02-033N

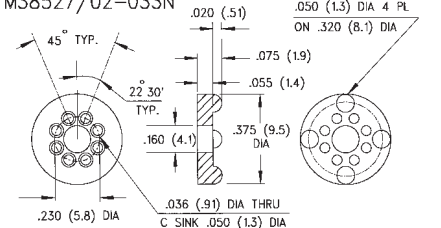

617-075 8 LEADS


PRICE CODE: B

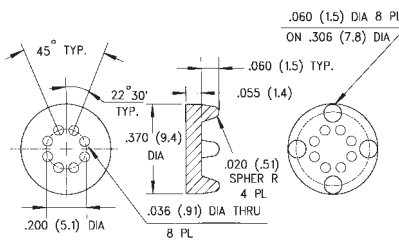

603-115 8 LEADS


**ONLY THE FINEST  
U.L. RATED MATERIALS  
ARE USED**  
**PRECISION MOLDED**

A55485/02-030N PRICE CODE: B  
M38527/02-030N

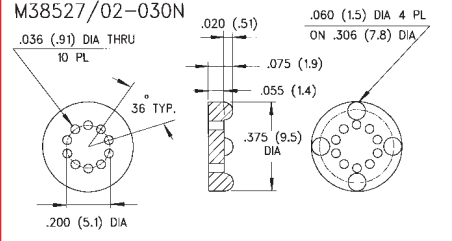


611-075 10 LEADS

PRICE CODE: B

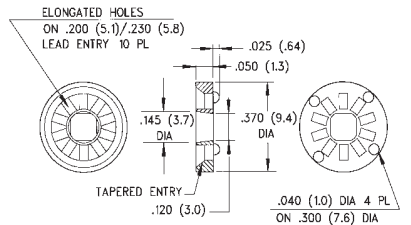


606-075 COLOR: RED 10 LEADS

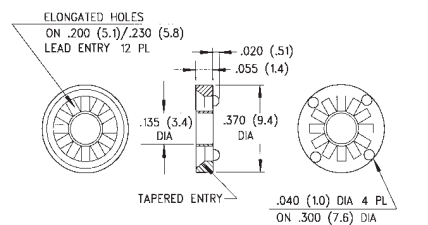

607-075 12 LEADS

PRICE CODE: B


.300 (7.6) DIA EXIT PRICE CODE: C

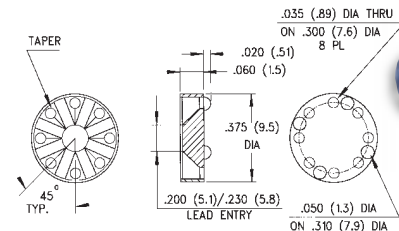

711-085 8 LEADS


**VISIT US ON-LINE!**  
[www.bivar.com](http://www.bivar.com)

A55485/04-013N PRICE CODE: C  
M38527/04-013N

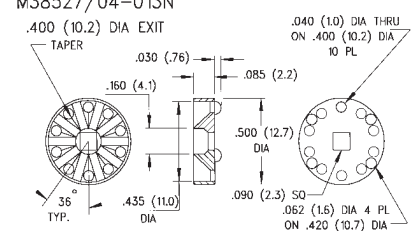


701-130 COLOR: RED 10 LEADS

PRICE CODE: B

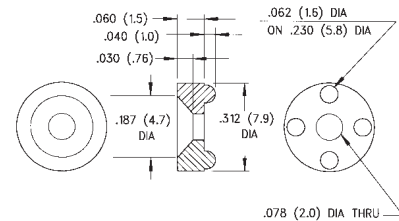


400-100

A55485/07-007N PRICE CODE: A  
M38527/07-007N



420-078

PRICE CODE: C

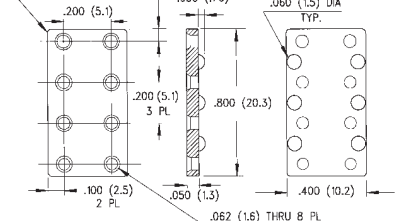

408-080

**Material Specifications:**

White or Natural Nylon, per ASTM D 4066 PA111, U.L. Rated 94V-2

**Oxygen Rating Index:** Over 28%

**Standard Drawing Tolerances,** unless otherwise indicated:

Fractions: = ± 1/64 (.40) .X = ± 1/64 (.40) .XX = ± .010 (.254) .XXX = ± .005 (.127)

