
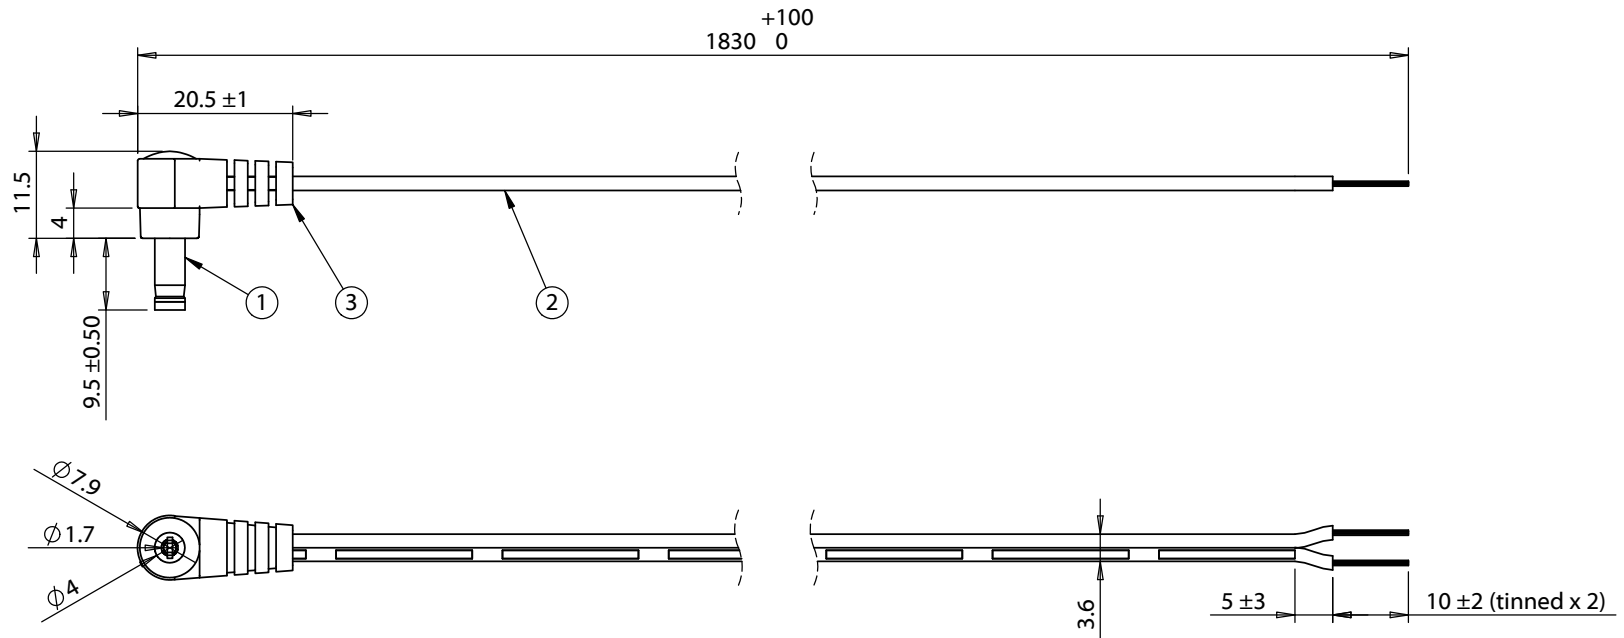


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00382	Connector, dc plug, 4.0x1.7xL19 mm, molding, spring contacts, nickel plated, yellow insulator	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
3	24-00044	Overmold, PVC, black	1	



Wiring Diagram	
50-00382	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY		
A1	8/11/2011	Added 90° connector diagram		RoHS and REACH compliant	tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com		
A2	8/31/2012	Updated description, connector, and wire information	Verified:	Function test: no open, no short circuit, no intermittent			
A3	6/27/2012	Updated connector description	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 4.0x1.7x10 mm, 90° 50-00382 dc plug to stripped tinned, 24 AWG, 30-00003 wire	Size:	Part number:	
A4	10/9/2013	Changed connector to 50-00382				A	053-0197R (CA-2198)
					Scale: 1:2		Sheet 1 of 1