


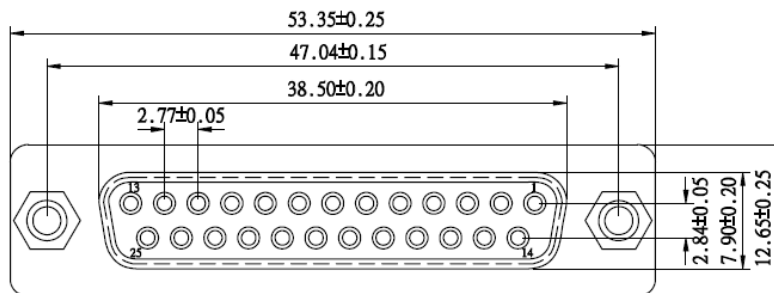


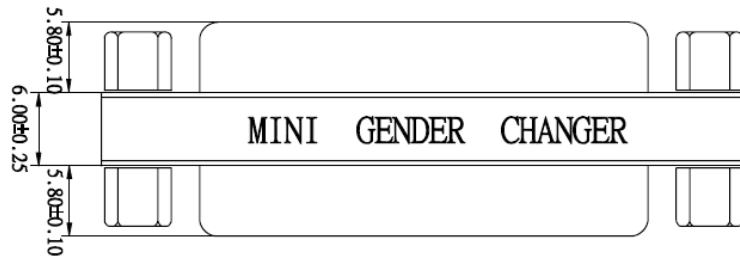

DESCRIPTION: D-SUB MINI GENDER CHANGER DB25 F TO F  
 MODEL NUMBER: 30-9534  
 APPLICATION: ADAPTER  
 CRIMP TOOL: N/A  
 IMPEDANCE: N/A  
 FREQUENCY RANGE: N/A  
 MATERIAL: INSULATOR PBT GLASS FIBRE REINFORCED UL 94 V0  
 CONTACT BRASS GOLD FLASH PLATED  
 SHELL TIN PLATED SHELL  
 RoHS COMPLIANCE: YES  
 TECHNICAL DETAIL: N/A

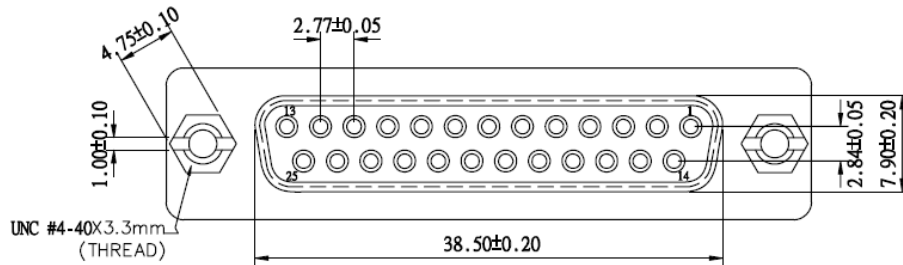

UNC #4-40 Hexscrew



UNC #4-40 Hexnut



DGC 25 F/F GENDER CHANGER  
 PIN OUT: 25Female 25Female

1	-----	1
2	-----	2
24	-----	24
25	-----	25
G	-----	G

<p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not to be copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</p>	<p>3RD ANGLE PROJECTION</p>	<b>AIM-Cambridge</b>	
	<p>RoHS2 <input checked="" type="checkbox"/></p> <p>2011/65/EU</p> <p>UNLESS OTHERWISE SPECIFIED UNITS: METRIC</p> <p>.X ±.51</p> <p>.XX ±.127</p> <p>ANGLES ±2°</p>	<p>Title: D-SUB MINI GENDER CHANGER DB25 F TO F</p> <p>Model No. 30-9534</p>	<p>Size A</p> <p>DO NOT SCALE DRAWING</p>