
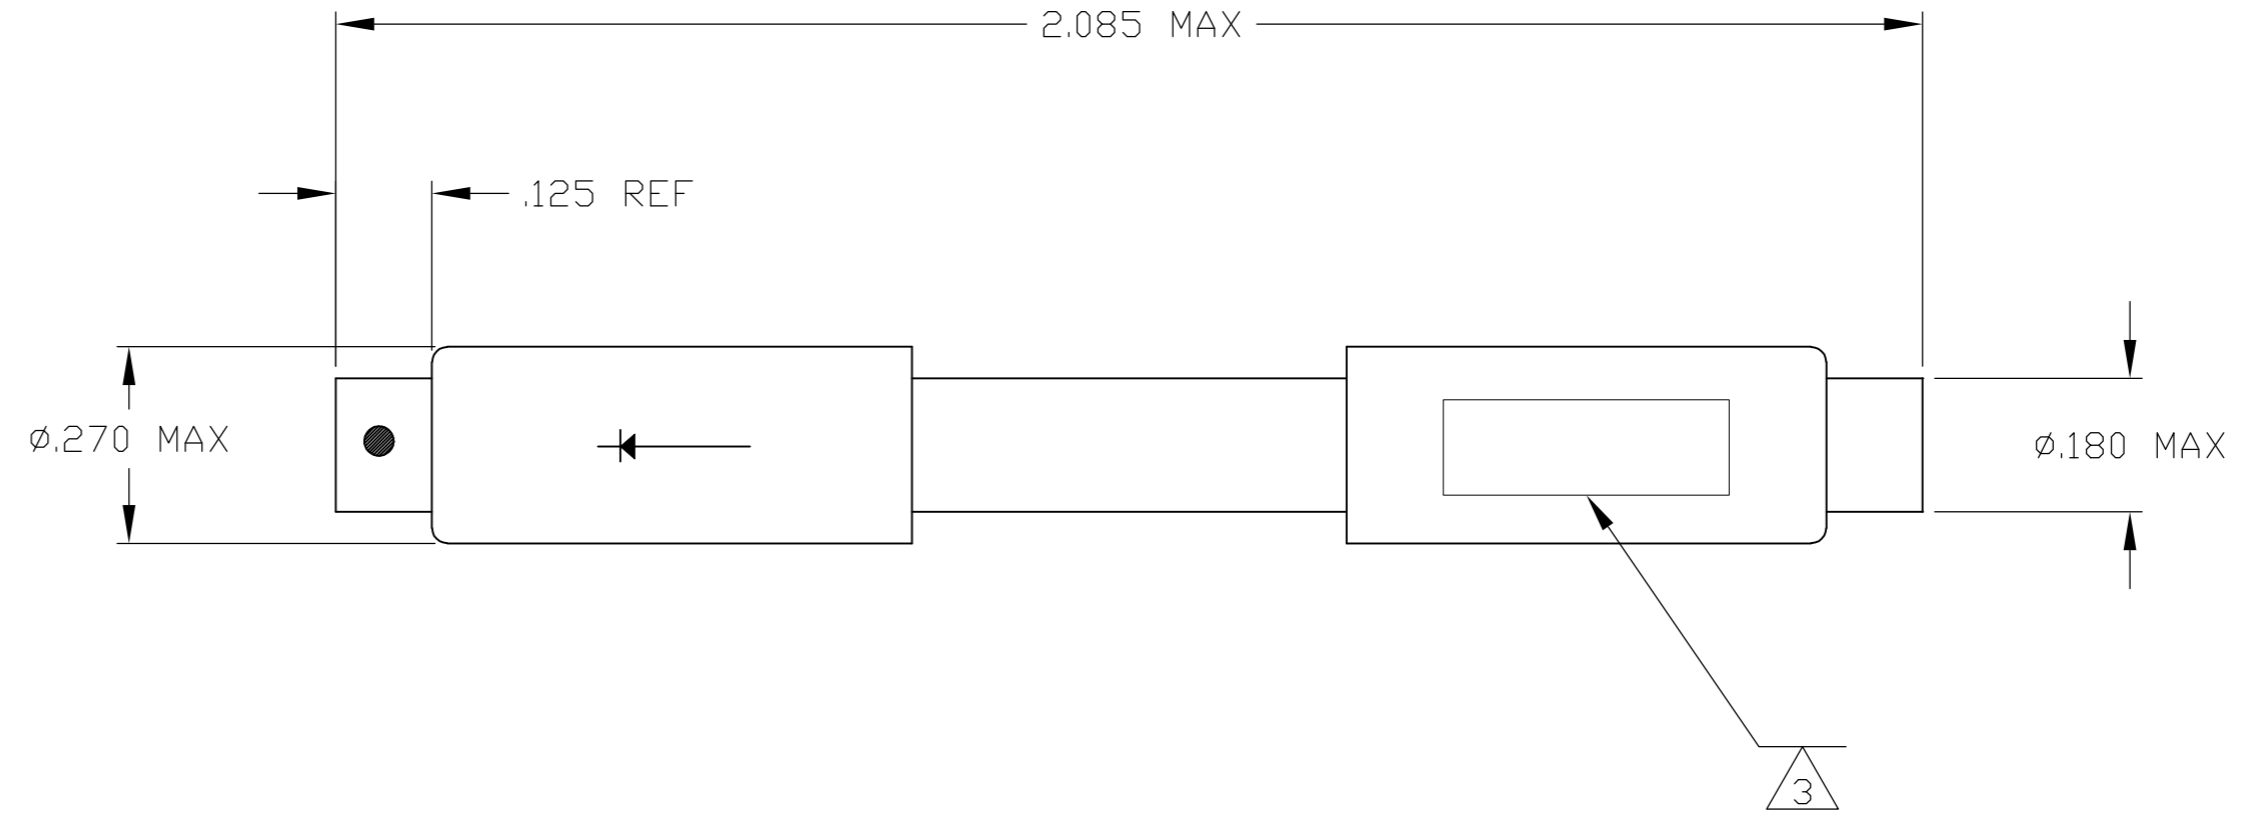








THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - ,N/A .  
 © COPYRIGHT N/A By - ALL RIGHTS RESERVED.


LDC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
D		REV PER ECO-11-021546	09NOV11	PY	DE		

DESCRIPTION	MATERIAL	FINISH
GROMMET	100% FLUOROSILICONE	COLOR NATURAL
SPLICE ASSEMBLY HOUSING	EPOXY	COLOR BLACK
CONTACT FEMALE SOCKET	BERYLLIUM COPPER	PER MIL-T-81714
CLIP CONTACT RETAINING	BERYLLIUM COPPER PER QQ-C-533 OR STAINLESS STEEL PER QQ-S-766	NONE
TUBE SHRINK	PER MIL-1-23053/8	COLOR TRANSPARENT
DIODE	JAN1N5618 	_____



- 1. FOR PIN CONTACT, SEE CUSTOMER DRAWING 592404, PART NO. 2-592404-1.
-  SPLICE PART NO. INCLUDES SIZE 20 MATING PIN CONTACTS.
-  AMP, AMP PART NO. AND DATE CODE MARKED IN THIS APPROXIMATE AREA.
-  SAME AS -1 EXCEPT PART IS RoHS COMPLIANT
-  DIODE MQ1N5618, MX1N5618 OR MXV1N5618 MAY BE SUBSTITUTED FOR JAN1N5618 DIODES MAY BE A COMMERCIAL DIODE THAT HAS BEEN UP-SCREENED TO MEET THE REQUIREMENTS OF JAN1N5618

	5-591847-1
	591847-3
-	591847-2
-	591847-1
REMARKS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. C. THOMAS 11NOV2003	 TE Connectivity	
DIMENSIONS: INCHES		CHK D. EABY 11-11-03		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. EABY 11-11-03	NAME WIRE SPLICE ASSY, SINGLE DIODE, SIZE 20, TJ	
0 PLC ± -		PRODUCT SPEC	SIZE	
1 PLC ± -		APPLICATION SPEC	CAGE CODE	DRAWING NO
2 PLC ± -			A200779	C-591847
3 PLC ± .005			RESTRICTED TO	
4 PLC ± -				
ANGLES ± -		WEIGHT	SCALE	SHEET
FINISH		-	4: 1	1 OF 1
MATERIAL SEE TABLE		CUSTOMER DRAWING	REV	D
SEE TABLE				