

# 3A/4A Low Quiescent Current High Efficiency Synchronous Buck Regulator

## Description

The ISL8023AEVAL3Z, ISL8024AEVAL3Z boards are intended for use by individuals with requirements for point-of-load applications sourcing from 2.7V to 5.5V. The ISL8023AEVAL3Z, ISL8024AEVAL3Z simple smallest factor evaluation boards are used for a quick and easy demonstration of the performance of the [ISL8023A](#), [ISL8024A](#) low quiescent high efficiency synchronous buck regulator.

The ISL8023A and ISL8024A are offered in a 3mmx3mm 16 Ld TQFN package with 1mm maximum height. The complete area that the converter occupies can be as small as 0.22in<sup>2</sup>.

## Specifications

PART NUMBER	V <sub>IN</sub> RANGE (V)	V <sub>OUT</sub> RANGE (V)	I <sub>OUT</sub> (MAX) (A)	f <sub>SW</sub> RANGE (MHz)	PART SIZE (2mm)
8023A	2.7V to 5.5V		3	Programmable 0.5 to 4MHz	3x3
8024A			4		

### NOTES:

1. The evaluation boards default configuration is V<sub>OUT</sub> = 1.8V, f<sub>SW</sub> = 2MHz (FS tied to V<sub>IN</sub>)
2. V<sub>REF</sub> is 0.6V

## Key Features

- High efficiency synchronous buck regulator with up to 95% efficiency
- 0.8% reference accuracy over temperature/load/line
- Start-up with prebiased output
- Internal soft-start - 1ms or adjustable
- Soft-stop output discharge during disabled
- Adjustable frequency from 500kHz to 4MHz - default at 2MHz
- External synchronization up to 4MHz
- Negative OC protection

## References

[ISL8023, ISL8024](#) Datasheet

## Ordering Information

PART NUMBER	DESCRIPTION
ISL8023AEVAL3Z	3A low quiescent current high efficiency synchronous buck regulator
ISL8024AEVAL3Z	4A low quiescent current high efficiency synchronous buck regulator

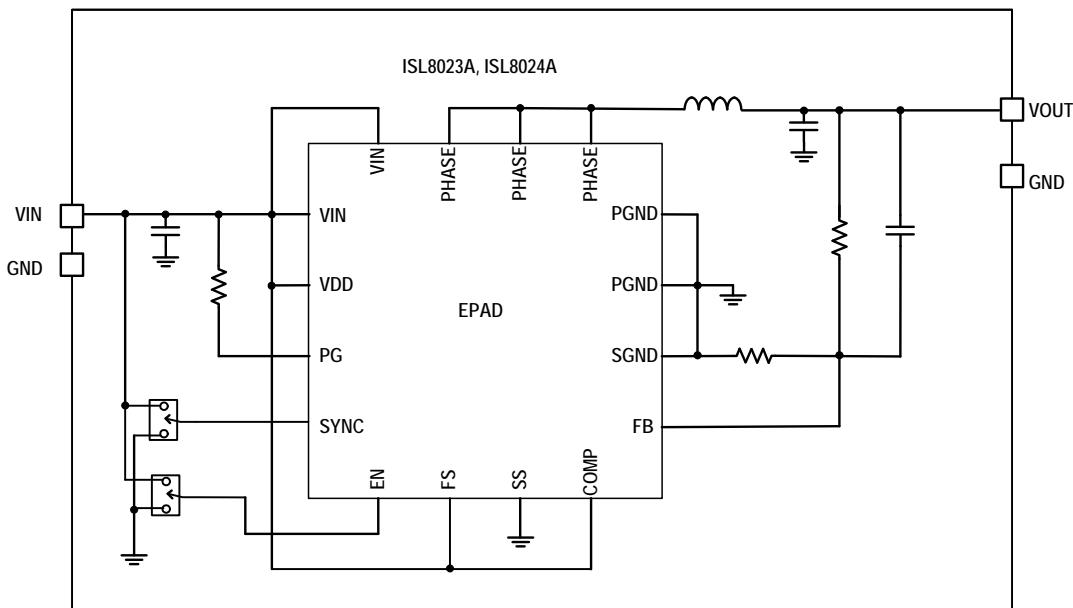


FIGURE 1. BLOCK DIAGRAM

## Recommended Equipment

The following materials are recommended to perform testing:

- 0V to 10V power supply with at least 10A source current capability or 5V battery
- Electronic loads capable of sinking current up to 7A
- Digital Multimeters (DMMs)
- 100MHz quad-trace oscilloscope
- Signal generator

## Quick Setup Guide

1. Ensure that the circuit is correctly connected to the supply and loads prior to applying any power.
2. Connect the bias supply to VIN, the plus terminal to VIN, P4 and the negative return to PGND, P5.
3. Connect the output load to VOUT, the plus terminal to VOUT, P3 and the negative return to PGND, P7.
4. Verify that the position is PWM for SW2.
5. Verify that the position is ON for SW1.
6. Turn on the power supply.
7. Verify the output voltage is 1.8V for VOUT.

## Evaluating the Other Output Voltage

The ISL8023AEVAL3Z, ISL8024AEVAL3Z kit output is preset to 1.8V for VOUT, however, output voltages can be adjusted from 0.6V to 5V. The output voltage programming resistor, R<sub>1</sub>, will depend on the desired output voltage of the regulator. The value for the feedback resistor is typically between 0Ω and 200kΩ, as shown in [Equation 1](#).

$$R_2 = R_1 \left( \frac{V_{FB}}{V_{OUT} - V_{FB}} \right) \quad (\text{EQ. 1})$$

If the output voltage desired is 0.6V, then R<sub>2</sub> is left unpopulated and R<sub>1</sub> is shorted. For faster response performance, add 10pF to 47pF in parallel to R<sub>1</sub>. Check bode plot to insure optimum performance.

## Frequency Control

The ISL8023A, ISL8024A has an FS pin that controls the frequency of operation. Programmable frequency allows for optimization between efficiency and external component size. Default switching frequency is 2MHz when FS is tied to VIN (R<sub>11</sub> = 0 and R<sub>12</sub> is open). By connecting R<sub>12</sub> to GND, the switching frequency could be changed from 1MHz (R<sub>12</sub> = 206k) to 4MHz (R<sub>12</sub> = 40k) according to [Equation 2](#):

$$R_T[\text{k}\Omega] = \frac{220 \cdot 10^3}{f_{OSC}[\text{kHz}]} - 14 \quad (\text{EQ. 2})$$

When using R<sub>12</sub> to adjust the operational frequency, this also sets external compensation mode. Please refer to the [ISL8023](#), [ISL8024](#) datasheet for more details.

## Soft-start Control

Short CSS to SGND for internal soft-start (approximately 1ms). Populate CSS to adjust the soft-start time. This capacitor, along with an internal 1.6μA current source, sets the soft-start interval of the converter, t<sub>SS</sub>.

$$CSS[\mu\text{F}] = 3.33 \cdot t_{SS}[\text{s}] \quad (\text{EQ. 3})$$

CSS must be less than 33nF to insure proper soft-start reset after fault condition.

## Switches Control

The ISL8023A, ISL8024A evaluation boards contain SW1 and SW2 for various controls of the ISL8023A, ISL8024A circuitries. [Table 1](#) details this function.


**TABLE 1. SWITCH SETTINGS**

SW1	ENABLE	FUNCTION
1	OFF	Disable VOUT
3	ON	Enable VOUT
<hr/>		
SW2	MODE	FUNCTION
1	PWM	Fixed PWM frequency at light load
3	PFM	Force continuous mode

## **ISL8023AEVAL3Z and ISL8024AEVAL3Z Evaluation Boards**



**FIGURE 2. ISL8023AEVAL3Z TOP**

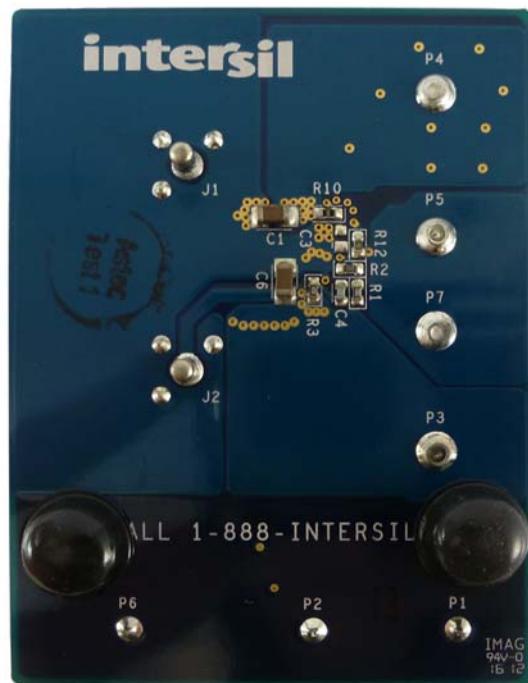

**FIGURE 3. ISL8023AEVAL3Z BOTTOM**




**FIGURE 4. ISL8024AEVAL3Z TOP**



**FIGURE 5. ISL8024AEVAL3Z BOTTOM**

## **ISL8023AEVAL3Z, ISL8024AEVAL3Z Schematic**

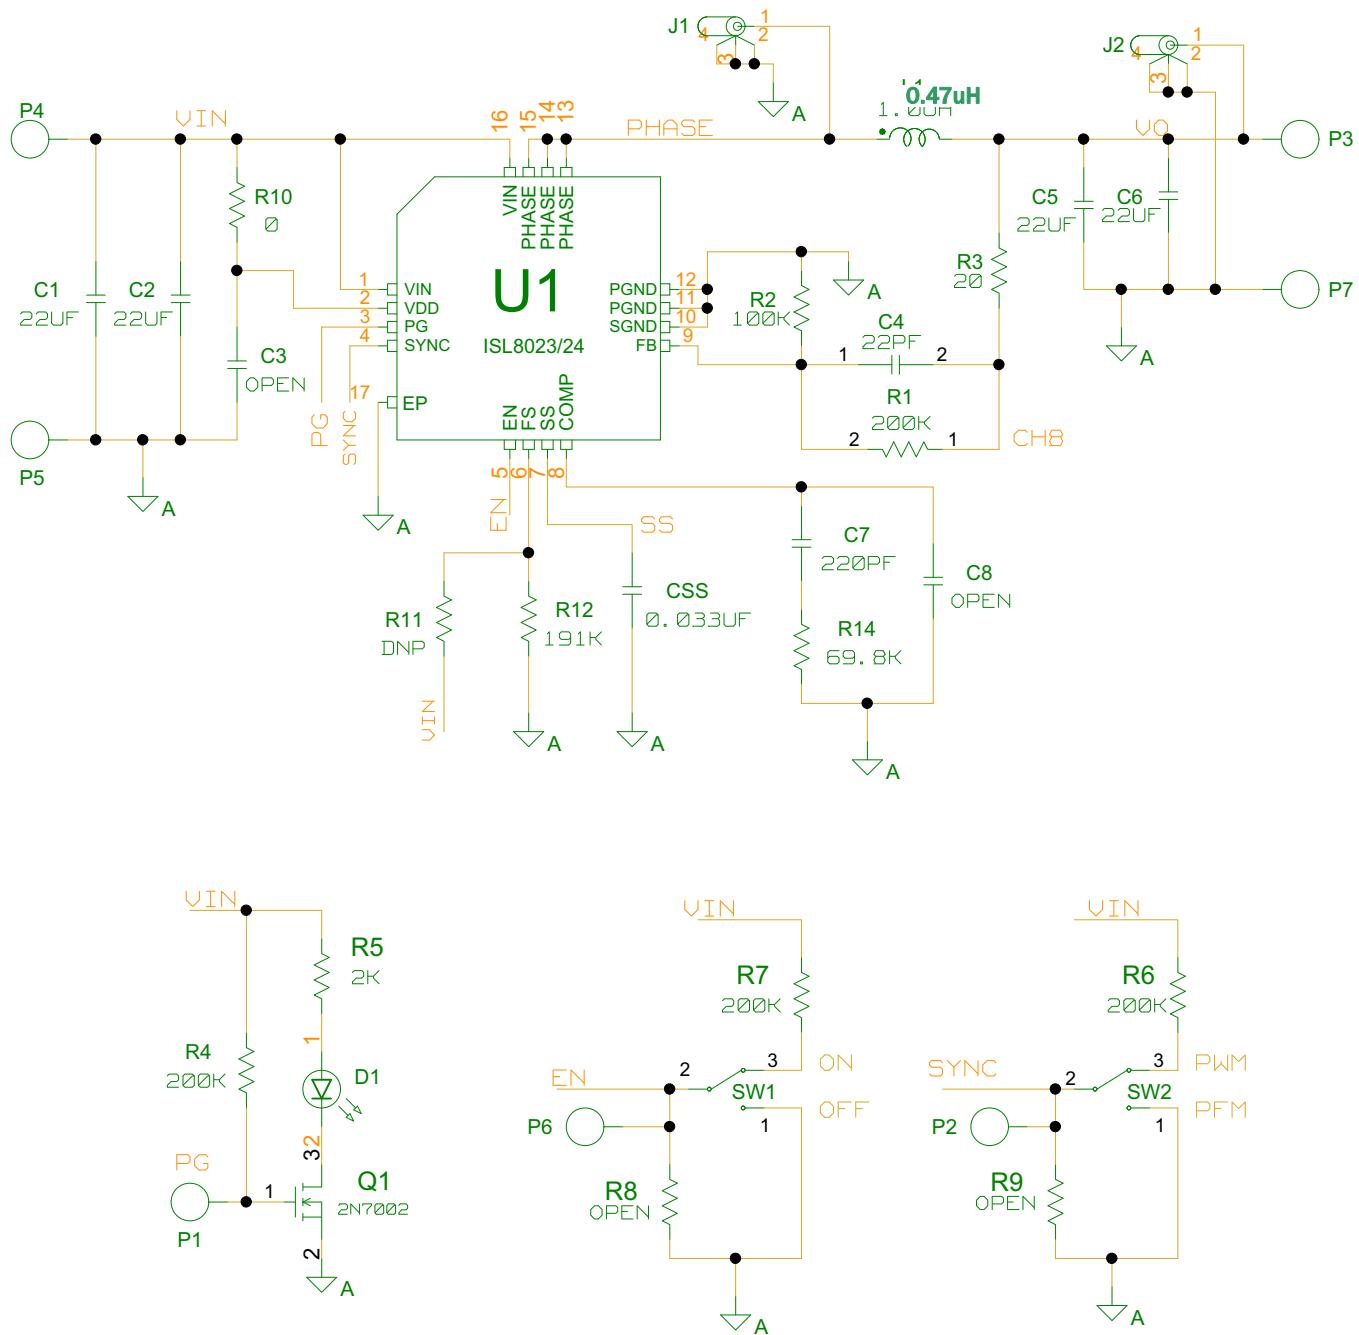

**FIGURE 6. SCHEMATIC**

## Application Note 1755

**TABLE 2. BILL OF MATERIALS**

MANUFACTURER PART	QTY	UNITS	REFERENCE DESIGNATOR	DESCRIPTION	MANUFACTURER
ISL8023_24AEVAL3ZREVAPCB	1	ea.		PWB-PCB, ISL8023_24EVAL3Z, REVA, ROHS	Generic
C0603C0G500-220JNE	1	ea.	C4	CAP, SMD, 0603, 22pF, 50V, 5%, COG, ROHS	VENKEL
GRM188R71H221KA01D	1	ea.	C7	CAP, SMD, 0603, 220pF, 50V, 10%, X7R, ROHS	MURATA
C0603X7R160-333KNE	1	ea.	CSS	CAP, SMD, 0603, 33000pF, 16V, 10%, X7R, ROHS	VENKEL
	0	ea.	C3, C8	CAP, SMD, 0603, DNP-PLACE HOLDER, ROHS	
GRM31CR60J226KE19L	2	ea.	C2, C5	CAP, SMD, 1206, 22μF, 6.3V, 10%, X5R, ROHS	MURATA
	0	ea.	C1, C6	CAP, SMD, 1206, DNP-PLACE HOLDER, ROHS	
FDVE0630-R47M	1	ea.	L1	COIL-PWR INDUCTOR, SMD, 7.4x6.7, 0.47μH, 20%, 14, 1A, ROHS	TOKO
131-4353-00	2	ea.	J1, J2	CONN-SCOPE PROBE TEST PT, COMPACT, PCB MNT, ROHS	TEKTRONIX
1514-2	4	ea.	P4, P5, P7, P8	CONN-TURRET, TERMINAL POST, TH, ROHS	KEYSTONE
5002	3	ea.	P1, P2, P6	CONN-MINI TEST POINT, VERTICAL, WHITE, ROHS	KEYSTONE
LTST-C170CKT	1	ea.	D1	LED-GaAs RED, SMD, 2X1.25mm, 100mW, 40mA, 10mcd, ROHS	LITEON/VISHAY
ISL8023/24AIRZ	1	ea.	U1	IC-3A/4A BUCK REGULATOR, 16P, QFN, 3X3, ROHS	INTERSIL
2N7002-7-F	1	ea.	Q1	TRANSISTOR, N-CHANNEL, 3 LD, SOT-23, 60V, 115mA, ROHS	DIODES, INC.
	0	ea.	R11	RESISTOR, SMD, 0603, 0.1%, MF, DNP-PLACE HOLDER	
ERJ-3EKF20ROV	1	ea.	R3	RES, SMD, 0603, 20Ω, 1/10W, 1%, TF, ROHS	PANASONIC
CR0603-10W-000T	1	ea.	R10	RES, SMD, 0603, 0Ω, 1/10W, TF, ROHS	VENKEL
CR0603-10W-1003FT	2	ea.	R2, R14	RES, SMD, 0603, 100k, 1/10W, 1%, TF, ROHS	VENKEL
CR-0603-10W-1913FT	1	ea.	R12	RES, SMD, 0603, 191k, 1/10W, 1%, TF, ROHS	VENKEL
CR0603-10W-2003FT	4	ea.	R1, R4, R6, R7	RES, SMD, 0603, 200k, 1/10W, 1%, TF, ROHS	VENKEL
	0	ea.	R5, R8, R9	RES, SMD, 0603, DNP-PLACE HOLDER, ROHS	
GT11MSCBE	2	ea.	SW1, SW2	SWITCH-TOGGLE, SMD, 6 PIN, SPDT, 2POS, ON-ON, ROHS	ITT INDUSTRIES/C&K DIVISION
	0	ea.	P3 (3VH30/1JN5)	DO NOT POPULATE OR PURCHASE	


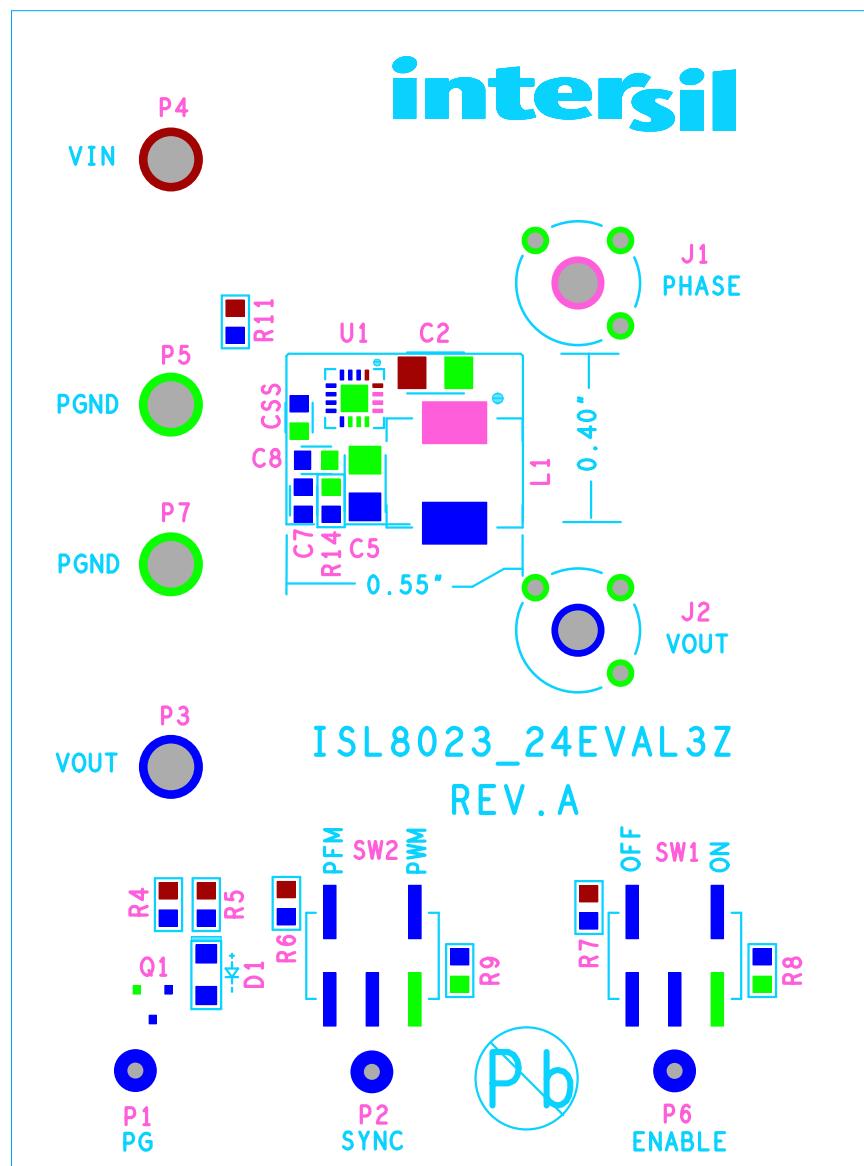
**ISL8023AEVAL3Z, ISL8024AEVAL3Z Board Layout**


FIGURE 7. TOP LAYER COMPONENTS

**ISL8023AEVAL3Z, ISL8024AEVAL3Z Board Layout (continued)**

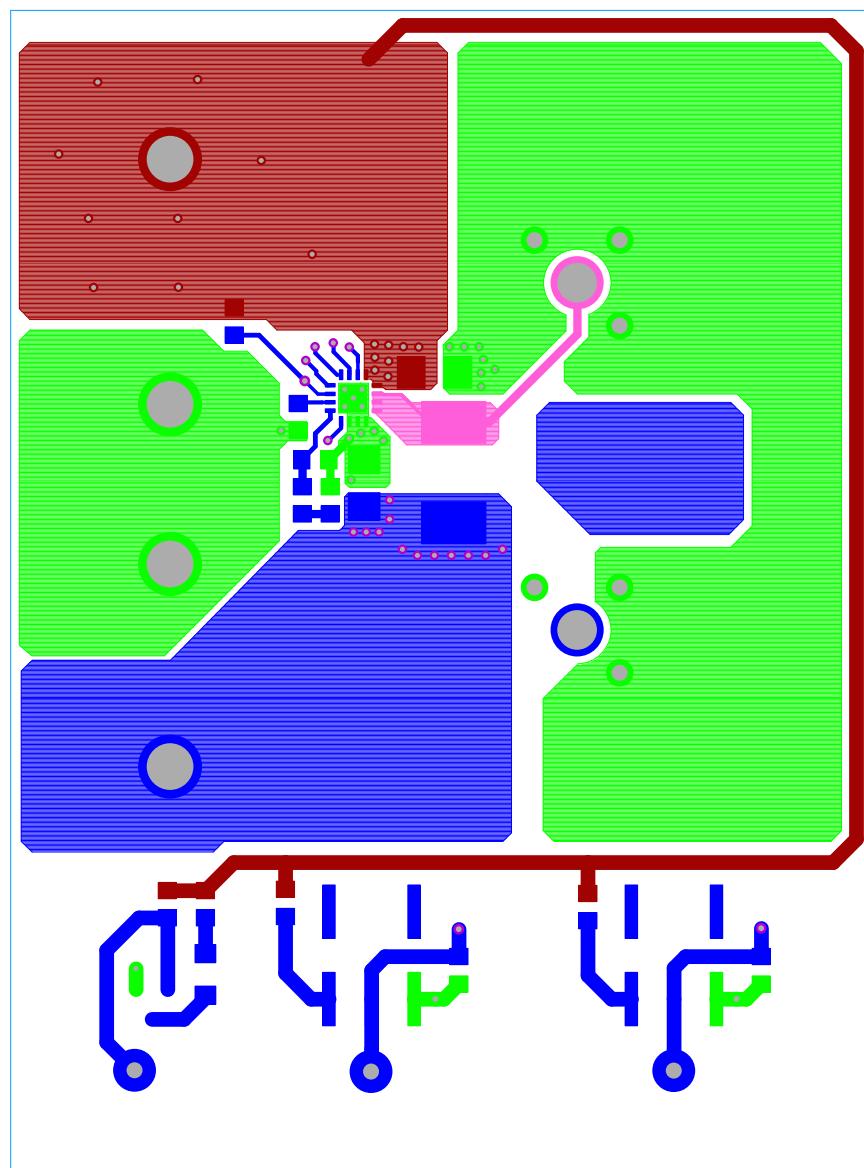


**FIGURE 8. TOP LAYER ETCH**

**ISL8023AEVAL3Z, ISL8024AEVAL3Z Board Layout (continued)**

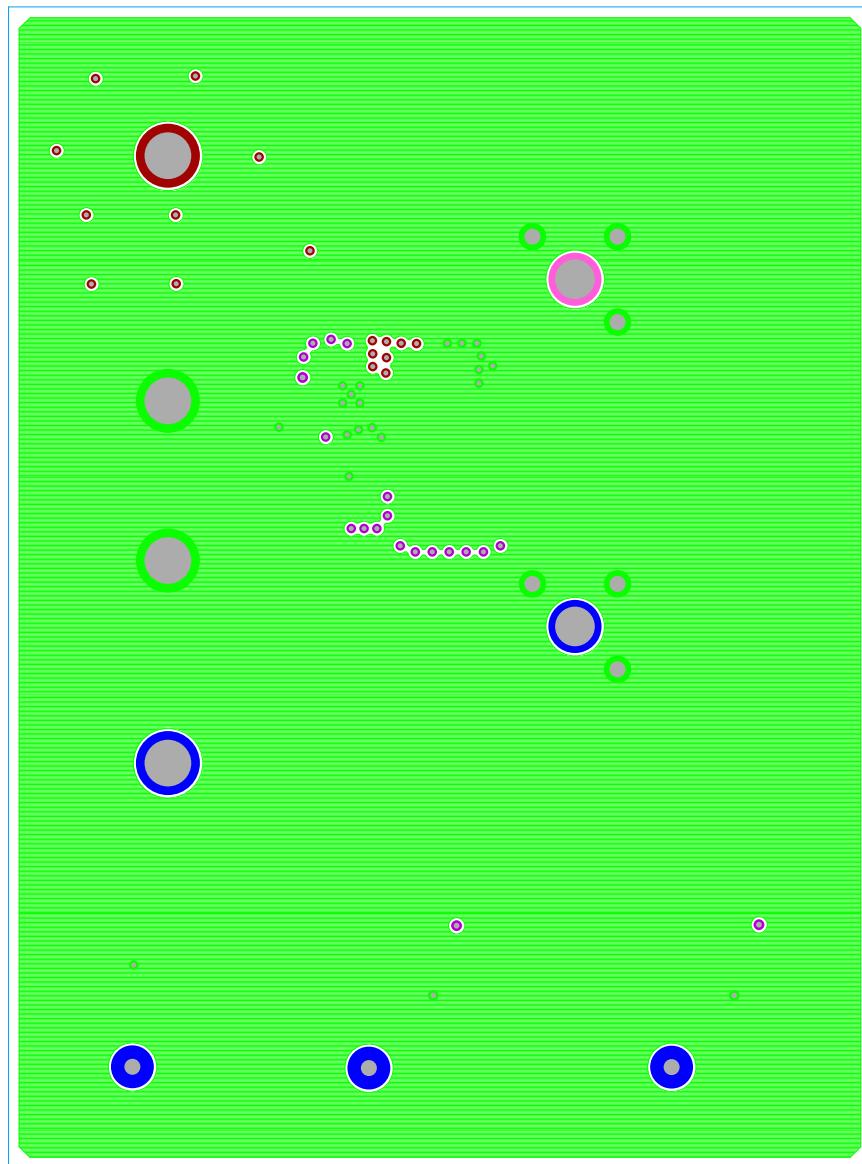


**FIGURE 9. SECOND LAYER ETCH**

**ISL8023AEVAL3Z, ISL8024AEVAL3Z Board Layout (continued)**

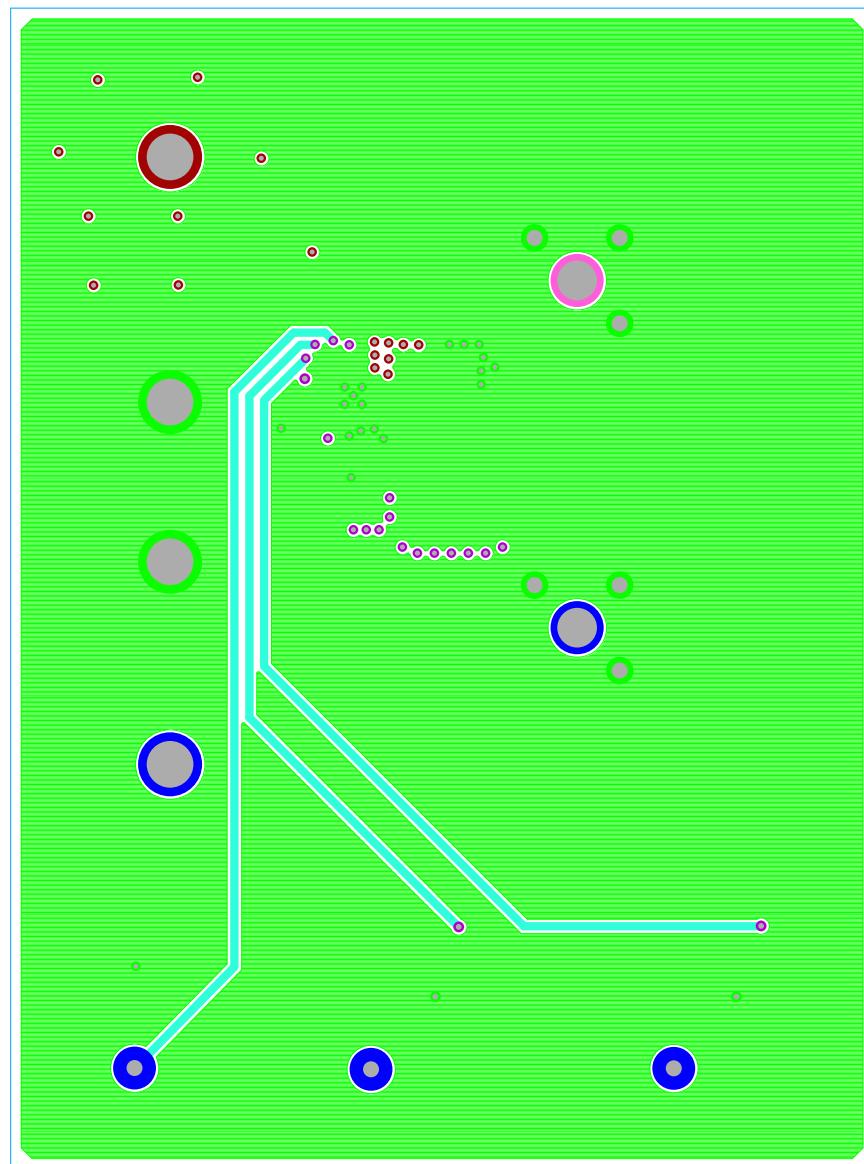


**FIGURE 10. THIRD LAYER ETCH**

**ISL8023AEVAL3Z, ISL8024AEVAL3Z Board Layout (continued)**

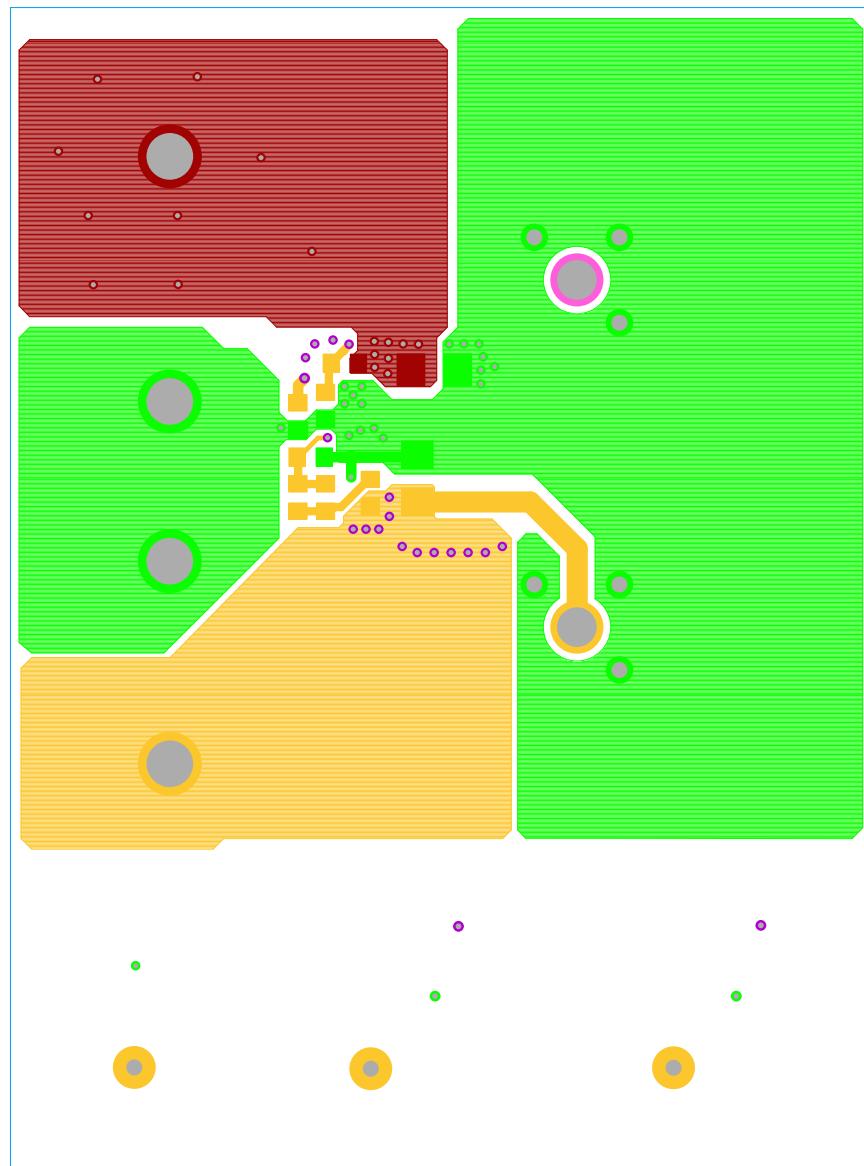

**FIGURE 11. BOTTOM LAYER ETCH**

**ISL8023AEVAL3Z, ISL8024AEVAL3Z Board Layout (continued)**

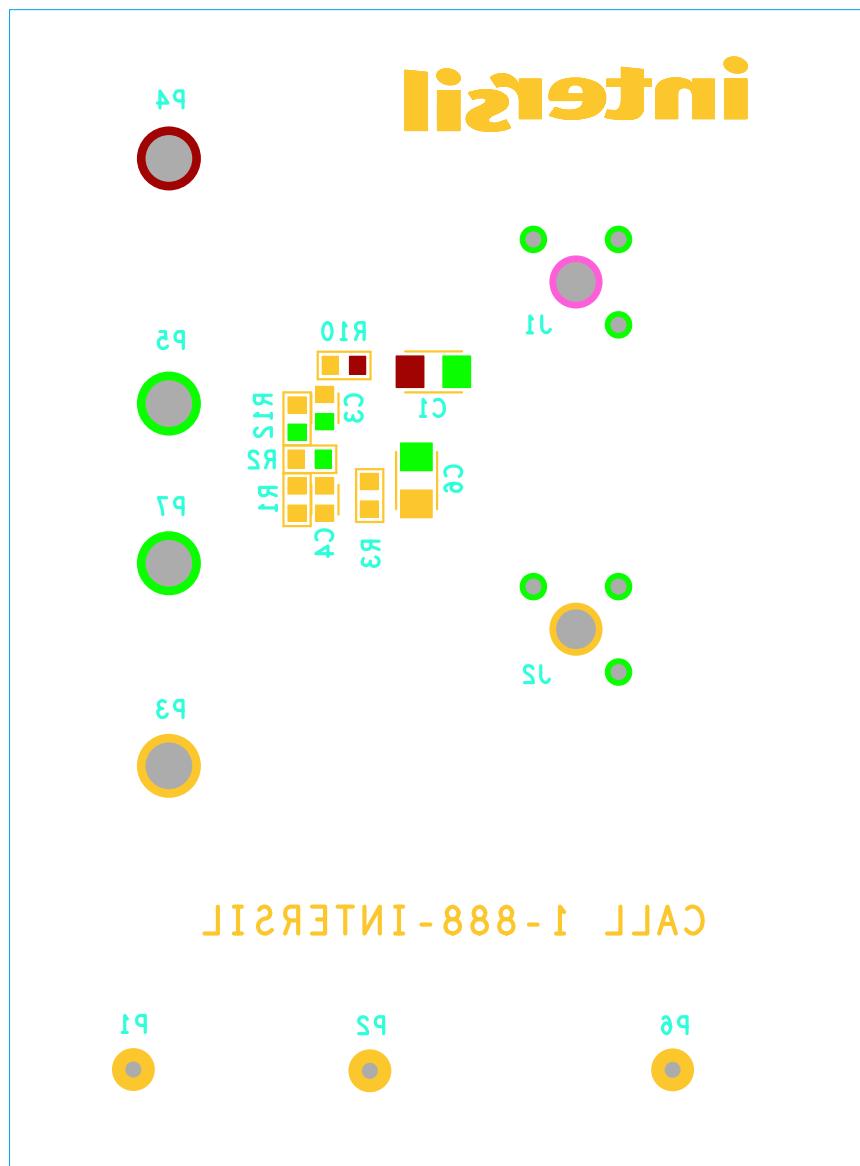

**FIGURE 12. BOTTOM LAYER COMPONENTS**

Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that the document is current before proceeding.

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)