

## SUMMARY



*Image is for illustrative purpose only*

### # Wires

Low	16
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

### Download

[Request a quote](#)

[Catalog](#)

Series	1T
Termination type	Female solder
IP rating	68
Cable Ø	0.00 - 0.00 mm
Matching parts	FGG.1T.316.CLAC50
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FGG*: Straight plug, cable collet and nut for fitting a bend relief, POM outer shell
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 0 - 0 mm
Variant	

### Performance

Configuration	
Insulator	
Rated Current	1.5 Amps

### Specifications

Contact Type:	Solder
Vtest:	1250 V (DC)900 V (AC)


### Others

Temp (min / max):	-55° C / +200° C
-------------------	------------------

Humidity (max): <=95% [at 60 deg C /140 F]  
 Vibration: 15 g [10 Hz - 2000 Hz]  
 Shock Resistance: 100 g [ 6 ms]  
 Salt Spray Corrosion: >144 hr  
 Climatological Category: 50/175/21  
 Shielding (min): 75 dB (10 MHz)  
 Shielding (min): 40 dB (1 GHz)  
 IP Rating: 68

## DRAWINGS

### Draws

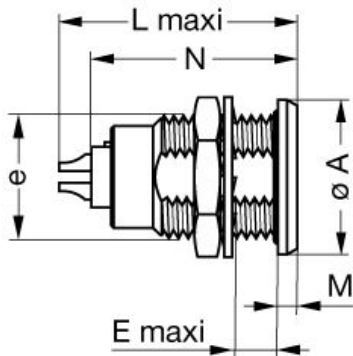

### Dimensions

	A	B	C	E	L	M	N	e
mm.	15.5	10.6	12.1	6	22.2	1.8	18.5	M12x1.0
in.	0,61	0,42	0,48	0,24	0,87	0,07	0,73	

## RECOMMENDED BY LEMO




### Tools

None

### Cables

CMN.16.B22.084PG3Z		Grey	
CMN.16.T28.059PGCE	PVC	GREY	
CMN.16.T28.059PGZE		Grey	
CMN.16.T28.059PNCE	PVC	Black	

Property of LEMO SA. All rights reserved  
This document is not contractual

CMN.16.T28.059PNZE			
CMN.16.T28.070NNZZ			
CMN.16.T30.047QGZE	TPR (medical)	Grey	
016 050	PVC	Black	
116 080	PUR	Black	
116 280	PVC	Black	