


## Specification Sheet

Part Number: 170-03064

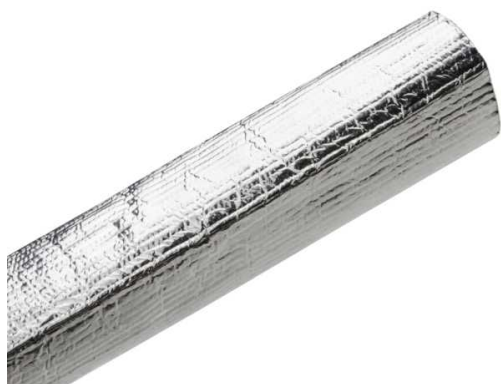

Braided Sleeving, Aluminum Laminated Fiberglass, 1" Dia, AL/GF,Silver, 100 ft/reel

**Article Number**

170-03064

**Type**

BSHTTST10SR

**Color**

Silver (SR)

**Features & Benefits**

- A layer of aluminum provides protection from chemicals, scraping, cuts and abrasion.
- Additional layer also provides insulation barrier for vulnerable wires and cables within high temperature environments.
- Cuts with ordinary scissors for fast, easy application.

**Quantity Per**

reel

**Product Description**

A tubular shaped sleeving product that combines the protection of bonded aluminum and fiberglass into a single solution that is able to deflect radiant heat away from sensitive components inside the tube.

**Short Description**

Braided Sleeving, Aluminum Laminated Fiberglass, 1" Dia, AL/GF,Silver, 100 ft/reel

Global Part Name

BSHTTST10SR-AL/GF-ML

Length L (Imperial)

100.0

Length L (Metric)

30.48

Bundle Diameter Min (Imperial)

0.1

Bundle Diameter Min (Metric)

2.54

Bundle Diameter Max (Imperial)

0.937

Bundle Diameter Max (Metric)

23.8

Diameter D (imperial)

1.0

Diameter D (metric)

25.4

Nominal Diameter (Imperial)

1

Nominal Diameter (Metric)

25.4

Wall Thickness WT (Imperial)

0.025

Wall Thickness WT (Metric)

0.64

Material

Aluminum (AL) Glass Fiber (GF)

Material Shortcut

AL GF

<b>Flammability</b>	Non-Flammable
<b>Halogen free</b>	Yes
<b>Operating Temperature (Metric)</b>	-76°F to +491°F (-60°C to +255°C)
<b>Reach Complaint(Article 33)</b>	Yes
<b>ROHS Complaint</b>	Yes
<b>Package Quantity(Imperial)</b>	100
<b>Package Quantity (Metric)</b>	30.48
<b>Customs Number</b>	7019901000
<b>Weight (Metric)</b>	2.0
<b>Weight (Imperial)</b>	4.50