



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
07/17/17	A	No components dim. changed to 400-450mm Quantity was 950 pcs.	T.B.	B.S.	
11/10/17	B	Changed orientation of part on reel	T.B.	B.S.	

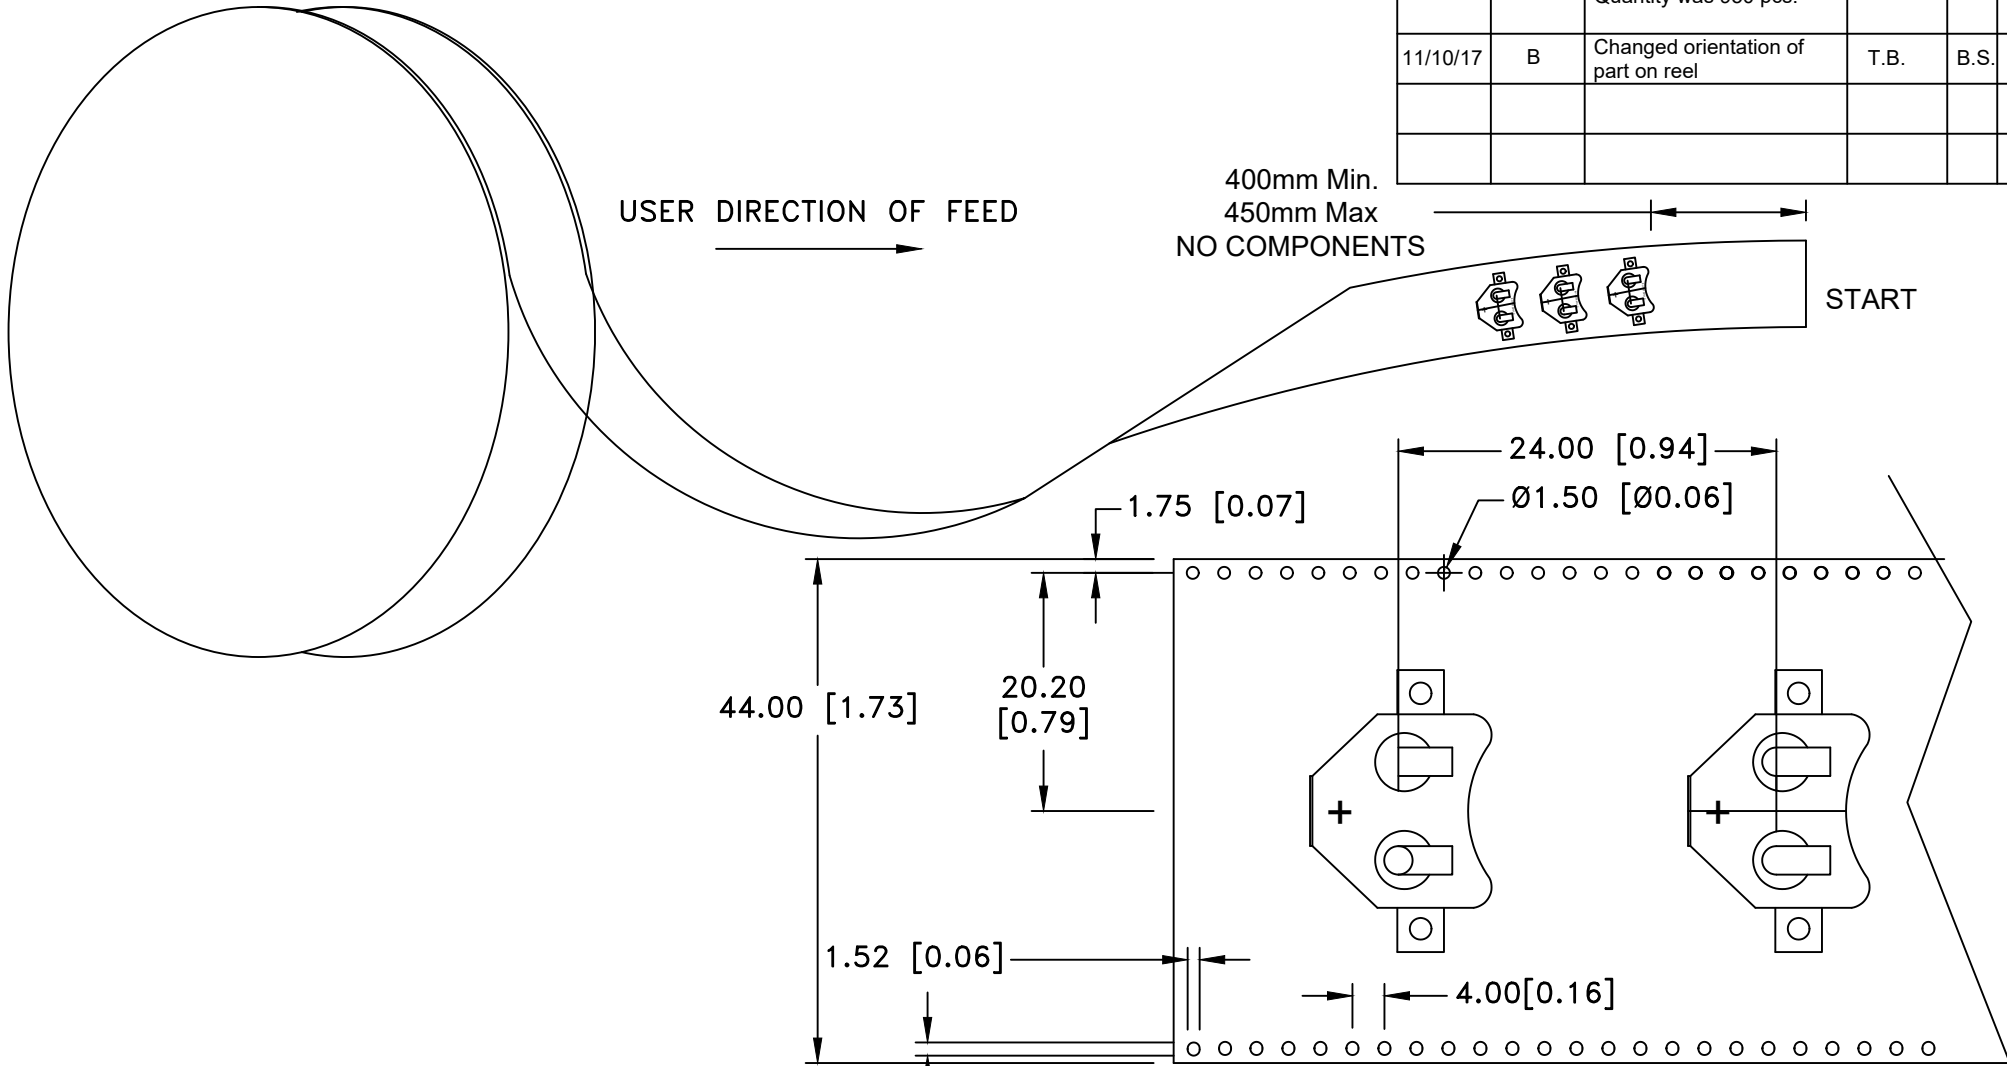

- NOTES:
- 10 Sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
 - Carrier camber not to exceed 1mm in 250mm
 - Material: Transparent Anti-static Polystyrene
 - Thickness: $0.35 \pm 0.05\text{mm}$
 - Component loader per 13" reel: 1000 pcs
 - All dimensions per EIA-481-C

ROHS Compliant

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal $\pm .5$ (.020)	Scale	Drawn By B.S.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR COIN CELL RETAINER		
Angular $\pm 3^\circ$	Date 11/10/17	Drawing Number BK-5067-TR	
		Approved By T.B.	