





| | |
|----------------|---------|
| PRODUCT NUMBER | PITCH |
| VMxx35x200J0G | 3.81 mm |

N = Number of poles
 Dim A = $N \times 3.81 + 0.80$
 Dim B = $(N - 1) \times 3.81$
 Dim C = $N \times 3.81 + 10.4$
 Dim D = $(N - 1) \times 3.81 + 9.0$
 N = Number of poles

PART NO.: VM xx 35 x 2 00J0 G

| | | | |
|--------------|----------|-----------------|--------------------------|
| Solid block | 0 | Black (RAL9005) | RoHS compliant (lead<4%) |
| No. of poles | 2 | Red (RAL3001/D) | In copper Alloy |
| 02 | 2 poles | 3 | Orange(RAL2011/P) |
| 03 | 3 poles | 4 | Yellow(RAL1018/A) |
| ... | ... | 5 | Green(RAL6018/T) |
| 24 | 24 poles | 6 | Blue (RAL5015/A) |
| | | 8 | Grey(RAL7035/D) |
| | | 9 | White(RAL1102) |
| | | C | Green(RAL6018/U) |

| Poles | Tolerance |
|---------|-----------|
| 2p-6p | ±0.20 |
| 7p-12p | ±0.25 |
| 13p-18p | ±0.30 |
| 19p-24p | ±0.40 |

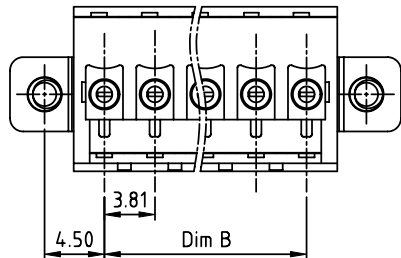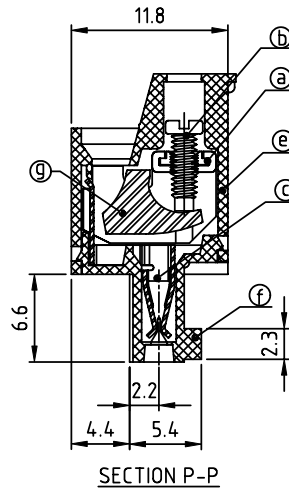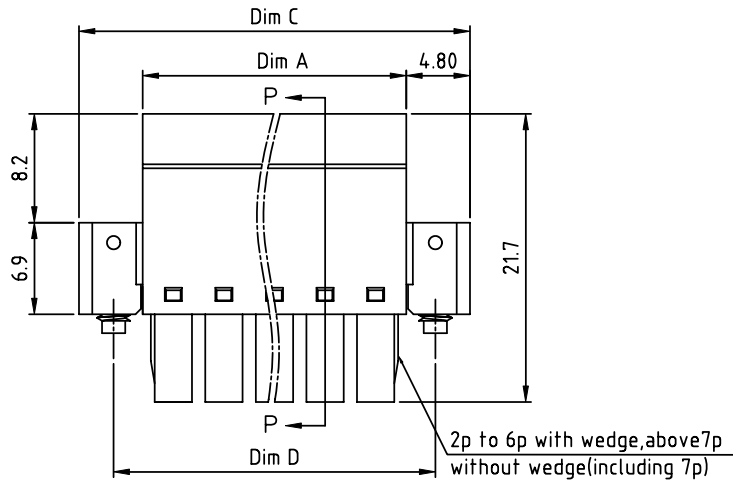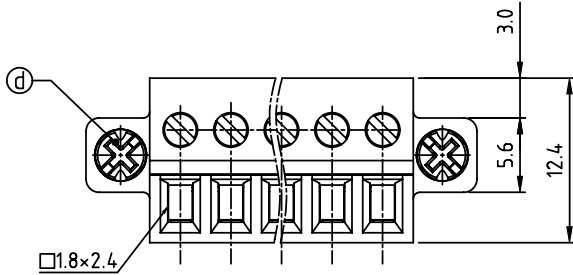

Material:

- Item (a) Clamp: Steel zinc plated.
 - Item (b) Terminal screw: Brass Zinc plating "-" slot type
 - Item (c) Female contact: PhBz Tin plated
 - Item (d) With flange screw: Steel zinc plated M2.5"/+/-" combination type
 - Item (e) Terminal (top body): Thermoplastic (UL94V-0)
 - Item (f) Terminal (bottom body): Thermoplastic (UL94V-0)
 - Item (g) Clampcase: Steel Zinc plated
- Electrical cULus
- Voltage rating: 300VAC
 - Current rating: 10A
 - Wire range:
 - Solid wire(AWG): 16-28
 - Stranded wire(AWG): 16-28
 - Torque: 1.7Lb-In
 - Screw: M2
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Safety approval:

| | | | | | | | | |
|--------------------|----------------|---------------------------------------|----------------------|------------|----------------|---|------|--|
| mat'l. code | | surface ASME Y14.5 ✓ | tolerance ASME Y14.5 | projection | product family | | | |
| ltr ecn no dr date | | tolerances unless otherwise specified | | | TERMINAL BLOCK | | | |
| | | angles | X.±0.5 | MM | title | | | |
| | | X'±1" | X.X±0.3 | scale | | TERMINAL BLOCK PLUGGABLE PLUG, WITH FLANGE | | |
| | | dr | EVIN ZHONG 041914 | | dwg no | sheet 1 of 1 | size | |
| | | enr | EVIN ZHONG 041914 | | VMxx35x200J0G | A4 | | |
| | | chr | HANKE FENG 041914 | | type | CUSTOMER Drawing | | |
| | | appd | SHI JUN 041914 | | | | | |
| sheet index | revision sheet | A | 1 | | | | | |